

HIKVISION®



KATALOG RETAIL 2024

www.hikvision.com

Hikvision Lampu Kamera

Smart Hybrid Light



NEW

DS-2CE18D0T-LFS

- 2 MP, 2.8 mm, 3.6 mm and 6mm fixed focal lens
- Smart Hybrid light
- High quality audio with audio over coaxial cable, built-in mic
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE16D0T-LPFS

DS-2CE16D0T-LFS

- 2MP CMOS Sensor, 1080P@25fps(P)(Default)/30fps(N), EXIR, 25m IR+20m White Light,
- Outdoor Dual-light Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI),
- Smart Lighting With Acusense DVR ,OSD Menu (Up the Coax), IP67,2.8/3.6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal



DS-2CE76D0T-LPFS

DS-2CE76D0T-LMFS

- 2MP CMOS Sensor, 1080P@25fps(P)(Default)/30fps(N), EXIR, 20m IR+20m White Light,
- indoor Dual-light Turret, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI),
- Smart Lighting With Acusense DVR ,OSD Menu (Up the Coax), 2.8/3.6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal



DS-2CE16D0T-EXLPF

DS-2CE16D0T-EXLF

- 2MP CMOS Sensor, 1080P@25fps(P)(Default)/30fps(N), EXIR, 20m IR+20m White Light,
- Outdoor Dual-light Bullet, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67,2.8/3.6mm Lens Support TVI/AHD/CVI/CVBS video signal output
- Smart Lighting With Acusense DVR
- (P) : Plastic, (M) : Metal



DS-2CE76D0T-EXLPF

DS-2CE76D0T-EXLMF

- 2MP CMOS Sensor, 1080P@25fps(P)(Default)/30fps(N), EXIR, 20m IR+20m White Light,
- Outdoor Dual-light Bullet, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67,2.8/3.6mm Lens Support TVI/AHD/CVI/CVBS video signal output
- Smart Lighting With Acusense DVR
- (P) : Plastic, (M) : Metal



DS-2CE17D0T-IT1F

DS-2CE17D0T-IT3F

DS-2CE17D0T-IT5F

- 2MP CMOS Sensor, EXIR 30m IR,
- Outdoor EXIR Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, IP67, 2.8/3.6/6mm Lens,
- Support TVI/AHD/CVI/CVBS video signal output
- (X) : 1 : EXIR 30m IR
3 : EXIR 40m IR
5 : EXIR 80m IR



DS-2CE56D0T-IT1F

DS-2CE56D0T-IT3F

- HD1080p, 2MP CMOS Sensor, 2 pcs EXIR LEDs, 20m IR,
- Outdoor EXIR Eyeball, ICR, 0.1 Lux/F1.2, 12 VDC, Smart IR, DNR, IP66, 3.6/6mm Lens,
- Support TVI/AHD/CVI/CVBS video signal output
- (X) : 1 : EXIR 30m IR
3 : EXIR 40m IR
5 : EXIR 80m IR



DS-2CE16D0T-ITF

- 2MP CMOS Sensor, EXIR, 30m IR,
- Outdoor EXIR Bullet, ICR, 0.01 Lux/F1.2, 12VDC,
- Smart IR, OSD Menu(Up the Coax), IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output



DS-2CE76D0T-ITMF

- 2MP CMOS Sensor, EXIR 30m IR,
- Outdoor EXIR Turret, ICR, 0.01 Lux/F1.2, 12 VDC,
- Smart IR, DNR, OSD Menu(Up the Coax), IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output

ANALOG 3K



DS-2CE16K0T-LPFS

DS-2CE16K0T-LFS

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), EXIR, 25m IR+20m White Light,
- Outdoor Dual-light Bullet, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI),
- Smart Lighting With Acusense DVR, OSD Menu (Up the Coax), IP67, 2.8/3.6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal



DS-2CE76K0T-LPFS

DS-2CE76K0T-LFS

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), EXIR, 20m IR+20m White Light,
- indoor Dual-light Turret, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI),
- Smart Lighting With Acusense DVR, OSD Menu(Up the Coax), 2.8/3.6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal



DS-2CE16K0T-EXLPF

DS-2CE16K0T-EXLF

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), EXIR, 20m IR+20m White Light,
- Outdoor Dual-light Bullet, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), IP67, 2.8/3.6mm Lens Support TVI/AHD/CVI/CVBS video signal output
- Smart Lighting With Acusense DVR
- (P) : Plastic, (M) : Metal



DS-2CE76K0T-EXLPM

DS-2CE76K0T-EXLMF

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), EXIR, 20m IR+20m White Light,
- indoor Dual-light Turret, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), 2.8/3.6mm Lens Support TVI/AHD/CVI/CVBS video signal output
- Smart Lighting With Acusense DVR
- (P) : Plastic, (M) : Metal



DS-2CE19H0T-AIT3ZF

DS-2CE19H8T-AIT3ZF

- 5MP@20fps, 4MP@25fps(P)/30fps(N)(Default), EXIR, 80m IR, Auto Focus ,
- Outdoor Bullet, ICR, up to 0.003 Lux/F1.2, 12 VDC/AC24V, Smart IR, True WDR, 3D DNR, OSD Menu (Up the Coax), IP67, 2.7-13.5mm Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (X) : 1 : 30m IR
3 : 40m IR
8 : Lux 0.003



DS-2CE57H0T-VPITF

DS-2CE57H8T-VPITF

- 5MP@20fps, 4MP@25fps(P)/30fps(N)(Default), EXIR, 30m IR,
- Outdoor Vandal Proof Dome, ICR, 0.003 Lux/F1.2, 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu (Up the Coax), IP67, 2.8/3.6/6/8/12mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (x) : 0 : Lux 0.01
8 : Lux 0.003



DS-2CE5AH8T-AVPIT3ZF

DS-2CE59H8T-AVPIT3ZF

DS-2CE56H8T-AITZF

- 5MP@20fps, 4MP@25fps(P)/30fps(N)(Default), EXIR, 60m IR, Auto Focus ,
- Outdoor Vandal Proof Dome, ICR, up to 0.003 Lux/F1.2, 12 VDC/AC24V, Smart IR, True WDR, 3D DNR, OSD Menu(Up the Coax), IP67, 2.7-13.5mm Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- V : Outdoor Vandal Proof Dome



DS-2CE16H8T-ITF

DS-2CE16H8T-IT(X)F

DS-2CE16H0T-ITPF(s)

- 5MP@20fps, 4MP@25fps(P)/30fps(N)(Default), EXIR, 30m IR,
- Outdoor EXIR Bullet, ICR, 0.003 Lux/F1.2, 12VDC, Smart IR, True WDR, 3D DNR, OSD Menu (Up the Coax), IP67, 2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (X) : 1 : 30m IR
3 : 40m IR
5 : 80m IR



DS-2CE76H0T-ITPF(s)

DS-2CE76H0T-ITMF

DS-2CE76H8T-ITMF

- 5MP@20fps, 4MP@25fps(P)/30fps(N), EXIR, up to 30m IR,
- Outdoor EXIR Turret, ICR, 0.01 Lux/F1.2, 12 VDC, Smart IR, DNR, OSD Menu(Up the Coax), 2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal
- (S) : Built-in Mic, Audio up Coaxial(Only TVI),
- H0T : 0.01 Lux
H8T : 0.003 Lux

2MP



NEW

DS-2CE10DF0T-LPFS

DS-2CE10DF0T-LFS

- 2M CMOS Sensor, 2.8/3.6mm Lens
- Outdoor smart hybrid light Bullet 0.001Lux/F1.0 20m IR+20m White Light
- 3D DNR 12 VDC
- Built-in Mic Audio up Coaxial(Only TVI)
- OSD Menu(Up the Coax)
- IP67
- 24H ColorSmart Lighting With Acusense DVR Support TVI/AHD/CVI/CVBS video signal output



NEW

DS-2CE12DF0T-LFS

- 2M CMOS Sensor, 2.8/3.6/6mm Lens 24H Color
- Outdoor smart hybrid light Bullet 0.001Lux/F1.0 40m IR+40m White Light
- 3D DNR
- 12 VDC
- Built-in Mic Audio up Coaxial(Only TVI)
- OSD Menu(Up the Coax)
- IP67
- Smart Lighting With Acusense DVR Support TVI/AHD/CVI/CVBS video signal output



NEW

DS-2CE70DF0T-LPFS

DS-2CE70DF0T-LMFS

- 2M CMOS Sensor, 2.8/3.6mm Lens
- Outdoor smart hybrid light Turret 0.001Lux/F1.0 20m IR+20m White Light
- 3D DNR
- 12 VDC
- Built-in Mic Audio up Coaxial(Only TVI)
- OSD Menu(Up the Coax)
- IP67
- 24H Color Smart Lighting With Acusense DV Support TVI/AHD/CVI/CVBS video signal output



DS-2CE72DF0T-LFS

- 2M CMOS Sensor, 2.8/3.6mm Lens
- Outdoor smart hybrid light Turret 0.001Lux/F1.0 40m IR+40m White Light
- 3D DNR
- 12 VDC
- Built-in Mic Audio up Coaxial(Only TVI) OSD Menu(Up the Coax)
- IP67
- 24H Color Smart Lighting With Acusense DVR Support TVI/AHD/CVI/CVBS video signal output



NEW

DS-2CE10KF0T-L(P)FS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



NEW

DS-2CE12KF0T-LFS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



24/7

Gambar Berwarna

5MP



NEW

DS-2CE70KF0T-LM(P)FS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



NEW

DS-2CE72KF0T-LFS

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- High quality audio with audio over coaxial cable, built-in mic
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE10DF3T-(P)F(S)

- 2M BSI CMOS Sensor,
- Outdoor mini Bullet,0.0005Lux/F1.0, 0 Lux with Friendly Lighting,20M,3D DNR,DC 12V, OSD Menu (Up the Coax), 130dB True WDR, IP67, 2.8/3.6mm Lens,
- 24H Color,Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal
- (S) : Built-in Mic,Audio up Coaxial(Only TVI)



DS-2CE12DF3T-F(S)

- 2M BSI CMOS Sensor,
- Outdoor Bullet,0.0005Lux/F1.0, 0 Lux with Friendly Lighting,40M,3D DNR,DC 12V, OSD Menu(Up the Coax), 130dB True WDR, IP67, 2.8/3.6/6mm Lens,
- 24H Color,Support TVI/AHD/CVI/CVBS video signal output
- (S) : Built-in Mic,Audio up Coaxial(Only TVI),



DS-2CE72DF3T-FS

- 2M BSI CMOS Sensor,
- Outdoor Turret,0.0005Lux/F1.0, 0 Lux with Friendly Lighting,40M,3D DNR,DC 12V, OSD Menu(Up the Coax), 130dB True WDR, IP67, 2.8/3.6mm Lens,
- 24H Color,Support TVI/AHD/CVI/CVBS video signal output
- (S) : Built-in Mic,Audio up Coaxial(Only TVI),



DS-2CE70DF3T-(P)F(S)

- 2M BSI CMOS Sensor,
- Indoor Turret,0.0005Lux/F1.0, 0 Lux with Friendly Lighting,20M,3D DNR,DC 12V, OSD Menu(Up the Coax), 130dB True WDR, 2.8/3.6mm Lens,
- 24H Color,Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal
- (S) : Built-in Mic,Audio up Coaxial(Only TVI),

4K IN FULL COLOUR 24/7 WITH LIGHT & SOUND DETERRENCE

Pro Series 8 MP
with Live Guard & ColorVu Technology



DS-2CE16U1T-IT(x)F

DS-2CE16U7T-IT(3)F

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N),
- Outdoor EXIR Bullet , ICR, 0.01 Lux/F1.2, 12VDC, Smart IR,DNR, OSD Menu(Up the Coax), IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic
- U1T : 0.01 Lux, U7T : 0.003 Lux
- (X) : 1 : 30m IR, 3 : 60m IR, 5 : 80m IR



DS-2CE19U1T-IT3ZF

DS-2CE19U1T-AIT3ZF

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N),EXIR, 80m IR, Auto Focus ,
- Outdoor Bullet,ICR, 0.01 Lux/F1.2, Smart IR, DNR,OSD Menu(Up the Coax), IP67, 2.7-13.5mm Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (A) : 12VDC/AC24V



DS-2CE56U1T-ITZF

DS-2CE56U1T-AITZF

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N),EXIR, 60m IR, Auto Focus ,
- Indoor Dome,ICR, 0.01 Lux/F1.2,12 VDC/AC24V, Smart IR,DNR,OSD Menu(Up the Coax),2.7-13.5mm Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (A) : 12VDC/AC24V



DS-2CE57U1T-VPITF

DS-2CE57U7T-VPITF

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N), EXIR, 30m IR,
- Outdoor Vandal Proof Dome, ICR, up to 0.003 Lux/F1.2, 12VDC, Smart IR,DNR, OSD Menu (Up the Coax), IP67,3.6/6/8/12mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- U1T : 0.01 Lux
- U7T : 0.003 Lux



DS-2CE59U1T-(A)VPIT3ZFP

DS-2CE59U7T-AVPIT3ZF

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N), EXIR, 30m IR,
- Indoor EXIR Turret,ICR, up to 0.003 Lux/F1.2, 12VDC, Smart IR,DNR, OSD Menu(Up the Coax), IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal
- U1T : 0.01 Lux
- U7T : 0.003 Lux



DS-2CE5AU1T-AVPIT3ZF

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N),EXIR, 60m IR, Auto Focus ,
- Outdoor Vandal Proof Dome,ICR, 0.01 Lux/F1.2, 12 VDC/AC24V, Smart IR,DNR,OSD Menu(Up the Coax), IP67, 2.7-13.5mm Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (A) ; 12VDC/AC24V



DS-2CE76U1T-IT(P)F

DS-2CE76U7T-ITMF

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N), EXIR, 30m IR,
- Indoor EXIR Turret,ICR, up to 0.003 Lux/F1.2, 12VDC, Smart IR,DNR, OSD Menu(Up the Coax), IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal
- U1T : 0.01 Lux, U7T : 0.003 Lux



DS-2CE78U1T-IT(X)F

DS-2CE78U7T-IT3F

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N), EXIR, 30m IR,
- Outdoor EXIR Turret,ICR, 0.01 Lux/F1.2, 12VDC, Smart IR,DNR, OSD Menu(Up the Coax), IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- U1T : 0.01 Lux, U7T : 0.003 Lux
- (X) : 1 : 30m IR, 3 : 60m IR



DS-2CE79U1T-IT3ZF

- 8.3MP @12.5fps(Default),5MP@20fps, 4MP@25fps(P)/30fps(N),2MP@25fps(P)/30fps(N),EXIR, 60m IR, Auto Focus ,
- Outdoor Turret,ICR, 0.01 Lux/F1.2,12 VDC, Smart IR,DNR,OSD Menu(Up the Coax), IP67, 2.7-13.5mm Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output

TURBO HD PTZ



DS-2AE4225TI-D

- 1/2.8" CMOS, 1920x1080:30fps, TVI & CVBS output, 3D DNR, True WDR,
- Ultra-low light Powerde By DarkFighter Color: 0.005lux/F1.6, B/W:0.001lux/F1.6, Optical Zoom:25x, Digital Zoom:16X,
- Pan Speed: 0.1° ~ 80°/s, Tilt Speed: 0.1° ~ 80°/s,
- Up the Coax,100mIR,DC12V



DS-2AE4215TI-D

- 1/2.8" CMOS, 1920x1080:30fps, TVI & CVBS output, 3D DNR,
- Ultra-low light Powerde By DarkFighter Color: 0.005lux/F1.6, B/W:0.001lux/F1.6, Optical Zoom:15x,
- Pan Speed: 0.1° ~ 80°/s, Tilt Speed: 0.1° ~ 80°/s,
- Up the Coax,100m IR,DC12V



DS-2AE4225T-D

DS-2AE4225T-D3

- 1/2.8" CMOS, 1920x1080:30fps, TVI & CVBS output, 3D DNR, True WDR,
- Ultra-low light Powerde By DarkFighter Color: 0.005lux/F1.6, B/W:0.001lux/F1.6,
- Optical Zoom:25x, Digital Zoom:16X,
- Up the Coax,DC12V



DS-2AE4215T-D3

- 1/3" CMOS, 1920x1280:30fps, 3D DNR, ICR, Color: 0.05lux/F1.4, B/W:0.005lux/F1.4, Optical Zoom:15x, Focus:4.0-60mm, Digital Zoom:16X, Pan range:360° endless; Tilt range: -5°~90°(Auto Flip),
- Pan Speed: 0.1° ~160°/s, Tilt Speed: 0.1° ~120°/s,
- Up the Coax, 24VAC

COMING
SOON

HIKVISION®

Turbo HD 8.0

Wider vision, interactive connection

- POINT 01 – **TVI Two-way Audio**
Interactive communication with crystal-clear audio effect
- POINT 02 – **Compact Dual-lens Stitching**
Perfect 180-degree stitched images to ensure seamless visuals
- POINT 03 – **Upgraded Intelligence**
Improved night vision experience via Smart Hybrid Light; smarter video searching via AcuSearch

Two-way Audio

Smart Hybrid Light

Dual-lens Stitching

AcuSearch



www.hikvision.com
support@hikvision.com



TURBO 5 HD 5.0

More Than What You See



iDS-7204HQHI-M1/E

iDS-7208HQHI-M1/E

iDS-7216HQHI-M1/E

- Full-channel motion detection 2.0 or 2/4-ch false alarm filter,
- Up to 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,
- Up to 16-ch video&1-ch audio input, H.265/H.265+ compression,
- 2-ch IP video input(up to 24-ch IP), 1 SATA interface
- CH01-04:1920×1080P @15 fps, 4MP Lite@15fps/ch, 260 1U case



iDS-7204HUHI-M1/E

iDS-7208HUHI-M1/E

- Full-channel motion detection 2.0 or 4-ch false alarm filter,
- Up to 8 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,
- Up to 8-ch HDTV1 coaxial video&audio input, 1-ch RCA audio input,
- 4-ch IP video input(up to 16-ch IP), 1 SATA interface,
- H.265/H.265+ compression,
- 8MP: 8fps, 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, 260 1U case



iDS-7204HQHI-M1/S

iDS-7208HQHI-M1/S

iDS-7208HQHI-M2/S

iDS-7216HQHI-M1/S

iDS-7216HQHI-M2/S

iDS-7232HQHI-M2/S

- Full-channel motion detection 2.0 or 2/4-ch false alarm filter,
- Up to 32-ch Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,
- Up to 32-ch video&1-ch audio input, H.265/H.265+ compression, 1/2 SATA interface,
- 3MP @ 15fps, 1920×1080P @15 fps, 4MP Lite@15fps/ch, support CVBS output



iDS-7204HUHI-M1/S

iDS-7208HUHI-M1/S

iDS-7204HUHI-M2/S

iDS-7208HUHI-M2/S

iDS-7216HUHI-M2/S

- Full-channel motion detection or 4-ch false alarm filter,
- Up to 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,
- Up to 16-ch video&1-ch audio input, 1/2 SATA interface, H.265/H.265+ compression,
- 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, support CVBS output, stand alone 1U case



iDS-7204HUHI-M1/S

iDS-7208HUHI-M1/S

iDS-7208HUHI-M1/S

iDS-7208HUHI-M2/S

iDS-7216HUHI-M2/S

- Full-channel motion detection or 4-ch false alarm filter,
- Up to 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,
- Up to 16-ch video&1-ch audio input, 1/2 SATA interface, H.265/H.265+ compression,
- 5MP: 12fps, 4MP: 15fps, 3MP: 18fps, 1920×1080P: 25(P)/30(N) fps/ch, support CVBS output, stand alone 1U case



iDS-7204HTHI-M1/S

iDS-7204HTHI-M2/S

iDS-7208HTHI-M2/S

- Full-channel motion detection 2.0 or 4-ch false alarm filter,
- Up to 8 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 1/2 SATA interface, H.265/H.265+ compression,
- 8 MP@12fps, 5 MP@20fps, 4 MP/1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N), support CVBS output, standalone 1U case



iDS-7316HQHI-M4/S

iDS-7332HQHI-M4/S

- Full-channel motion detection 2.0 or 4-ch false alarm filter,
- Up to 32 Turbo HD/CVI / AHD / CVBS interface input,
- Up to 32-ch video&4-ch audio input, 4/16-ch IP video input(up to 48-ch IP), 2 RJ45 10M/100M/1000M self-adaptive Ethernet interface
- H.264/H.264+/H.265+/H.265 video compression, 4 SATA interface,
- 1920×1080P @15 fps, 4MP Lite @ 15fps/ch, Extended transmission distance over coax cable, 4K UHD output, 1.5U 19" case



iDS-7316HUHI-M4/S

- Full-channel motion detection 2.0 or 4-ch false alarm filter,
- 16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,
- 16-ch video&4-ch audio input, 18-ch IP video input(up to 34-ch IP),
- H.264/H.264+/H.265+/H.265 video compression, 4 SATA interfaces,
- 8MP: 8 fps/ch, 5MP: 12 fps/ch, 4MP: 15 fps/ch, Extended transmission distance over coax cable, 4K UHD output, alarm I/O: 16/4, 1.5U 19" case

Teknologi smart

HYBRID LIGHT

Seri Ekonomis ColorVu

Alarm lampu hanya menyala tepat saat dibutuhkan



White Light Mode

IR Mode



Iluminasi Cahaya Hybrid yang Fleksibel



Target Kendaraan dan Manusia dengan Warna Asli



Lampu Peringatan kepada Penyusup



NEW

DS-2CD1021G0-I

DS-2CD1021G0-IU

- 1/3" Progressive CMOS ICR
- 1920 x 1080: 25fps(P)/30fps(N)
- H.265+ /H.265/H.264+&H.264
- DWDR, 3D DNR, BLC
- IR range: up to 30m
- DC12V & PoE
- IU :Built-in microphone



NEW

DS-2CD1121G0-I

- 1/3" Progressive CMOS ICR
- 1920 x 1080: 25fps(P)/30fps(N)
- H.265+ /H.265/H.264+&H.264
- DWDR, 3D DNR, BLC
- IR range: up to 30m
- DC12V & PoE



NEW

DS-2CD1321G0-I

DS-2CD1321G0-IU

- 1/3" Progressive CMOS ICR
- 1920 x 1080: 25fps(P)/30fps(N)
- H.265+ /H.265/H.264+&H.264
- DWDR, 3D DNR, BLC
- IR range: up to 30m
- DC12V & PoE
- IU :Built-in microphone

Gunakan

Smart Hybrid Light

Kamera!



**3 Mode Pencahayaan
Tambahan**



NEW

DS-2CD1T23G2-LIUF

DS-2CD1T43G2-LIUF

- 1/3" Progressive CMOS, ICR
- 1T23:1920 × 1080: 25fps(P)/30fps(N)
- 1T43:2560 × 1440: 20fps(P)/(N),
- H.265+/H.265/H.264+&H.264,
- DWDR, 3D DNR, BLC,
- IR or white light range: up to 50m,
- Built-in microphone
- DC12V & PoE, Support mobile monitoring via Hik-Connect
- (F): SD Card Slot (up to 256GB)



NEW

DS-2CD1T63G2-LIUF

DS-2CD1T83G2-LIUF

- 1/3" Progressive CMOS, ICR
- 3200 × 1800: 20fps(P/N),
- 3840 × 2160: 12.5fps(P)/15fps(N)
- H.265+/H.265/H.264+&H.264,
- DWDR, 3D DNR, BLC,
- IR or white light range: up to 50m,
- Built-in microphone
- DC12V & PoE, Support mobile monitoring via Hik-Connect



DS-2CD1043G2-LIU

DS-2CD1023G2-LIU

DS-2CD1023G2-LIUF

- 1/3" Progressive CMOS, ICR,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080: 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC,
- IR or white light range: up to 30m,
- Built-in microphone, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- (F): SD Card Slot (up to 256GB)



DS-2CD1143G2-LIU

DS-2CD1123G2-LIU

DS-2CD1123G2-LIUF

- 1/3" Progressive CMOS, ICR,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080: 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC,
- IR or white light range: up to 30m,
- Built-in microphone, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- (F): SD Card Slot (up to 256GB)



DS-2CD1323G2-LIU

DS-2CD1323G2-LIUF

- 1/3" Progressive CMOS, ICR, 1920x1080: 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC,
- IR or white light range: up to 30m,
- Built-in microphone, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- (F): SD Card Slot (up to 256GB)

ColorVu LITE

Ekonomis & Berwarna

- F1.0 Super Aperture
- Sensor Canggih
- 30m Warm Light



DS-2CD1027G2H-LIU

DS-2CD1027G2H-LIUF

DS-2CD1047G2H-LIU

DS-2CD1047G2H-LIUF

NEW

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 30m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot (up to 512GB),



DS-2CD1327G2H-LIU

DS-2CD1327G2H-LIUF

DS-2CD1347G2H-LIU

DS-2CD1347G2H-LIUF

NEW

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 30m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot (up to 512GB),



DS-2CD1127G2H-LIU

DS-2CD1127G2H-LIUF

DS-2CD1147G2H-LIU

DS-2CD1147G2H-LIUF

NEW

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 30m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot (up to 512GB),



DS-2CD1T27G2H-LIU

DS-2CD1T27G2H-LIUF

DS-2CD1T47G2H-LIU

DS-2CD1T47G2H-LIUF

NEW

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 50m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot (up to 512GB),

Easy IP 1.0 2MP



DS-2CD2421G0-I

- 1/2.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.028 Lux @ (F2.0, AGC ON), 0 lux with IR; 25Fps/30fps(1920x1080);
- VCA functions; 2 streams; 3D DNR; BLC; ICR; EXIR, up to 10m; DC12V&PoE;
- Built-in mic&speaker; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service



DS-2CD2021G1-I

- 1/2.8" Progressive CMOS, ICR, 0lux with IR, 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC,
- Line crossing detection, Intrusion detection . IR range: up to 30m,
- HIK-Connect cloud service



DS-2CD2121G0-I

DS-2CD2121G0-IS

- 1/2.8" Progressive CMOS, ICR, 0lux with IR,
- 2MP : 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC,,Line crossing detection, Intrusion detection . IR range: up to 30m,
- Support on-board storage (SD card not included), HIK-Connect cloud service
- (S) : Audio/Alarm IO connectors



DS-2CD2321G0-I/NF

- 1/2.8" Progressive CMOS, ICR, 0lux with IR,
- 2MP : 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC,,Line crossing detection, Intrusion detection . IR range: up to 30m,
- HIK-Connect cloud service



DS-2CD2621G0-I

DS-2CD2621G0-IS

DS-2CD2621G0-IZ

DS-2CD2621G0-IZS

- 1/2.8" Progressive CMOS, ICR, 0lux with IR,
- 2MP : 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC,,Line crossing detection, Intrusion detection . IR: up to 30m,
- Support on-board card slot (SD card not included), HIK-Connect cloud service
- (S) : Audio/Alarm IO connectors
- (Z) : Motorized VF lens



DS-2CD2721G0-I

DS-2CD2721G0-IS

DS-2CD2721G0-IZ

DS-2CD2721G0-IZS

- 1/2.8" Progressive CMOS, ICR, 0lux with IR,
- 2MP : 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC,,Line crossing detection, Intrusion detection .IR: up to 30m,
- Support on-board card slot (SD card not included), Vandal-proof, HIK-Connect cloud service
- (S) : Audio/Alarm IO connectors
- (Z) : Motorized VF lens



DS-2CD2821G0

- 1/2.8" Progressive CMOS, ICR, Color: 0.005 Lux @ (F1.2; AGC ON),
- 2MP : 1920x1080:25fps(P)/30fps(N),
- H.265+/H.265/H.264/MJPEG, DC12V & PoE, 3D DNR, BLC,
- Support on-board card slot (SD card not included), HIK-Connect cloud service
- Audio/Alarm IO connectors.

NEW

**FOCUS
and
ACT**

AcuSense Technology



NEW

DS-2CD2023G2-LI

DS-2CD2023G2-LI2U

DS-2CD2043G2-LI

DS-2CD2043G2-LI2U

DS-2CD2063G2-LI

DS-2CD2063G2-LI2U

- 1/2.8" Progressive Scan CMOS; 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED; EXIR, up to 40m;
- DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service
- 2U:Built-in Dual-Array Microphone



NEW

DS-2CD2123G2-LI

DS-2CD2123G2-LIS2U

DS-2CD2143G2-LI

DS-2CD2143G2-LIS2U

DS-2CD2163G2-LI

DS-2CD2163G2-LIS2U

- 1/2.8" Progressive Scan CMOS; 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED; EXIR, up to 30m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service

*S model: Audio/Alarm IO

*2U:Built-in Dual-Array Microphone



NEW

DS-2CD2323G2-LI

DS-2CD2323G2-LI2U

DS-2CD2343G2-LI

DS-2CD2343G2-LI2U

DS-2CD2363G2-LI

DS-2CD2363G2-LI2U

- 1/2.8" Progressive Scan CMOS; 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED; EXIR, up to 40m;
- DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service
- * -2U:Built-in Dual-Array Microphone



NEW

DS-2CD2T23G2-2LI2U

DS-2CD2T23G2-4LI2U

DS-2CD2T43G2-2LI2U

DS-2CD2T43G2-4LI2U

DS-2CD2T63G2-2LI2U

DS-2CD2T63G2-4LI2U

- 1/2.8" Progressive Scan CMOS; 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- 3D DNR; BLC/HLC; ICR; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service

*-2LI/4LI model: 3000K Warm LED; EXIR, up to 60m/80m

* -2U:Built-in Dual-Array Microphone



NEW

DS-2CD2523G2-LI

DS-2CD2523G2-LIS2U

DS-2CD2543G2-LI

DS-2CD2543G2-LIS2U

DS-2CD2563G2-LI

DS-2CD2563G2-LIS2U

- 1/2.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(1920x1080);
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED;
- EXIR, up to 30m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;

*-S model: Audio/Alarm IO

* -2U:Built-in Dual-Array Microphone



DS-2CD2463G2-I

DS-2CD2443G2-I

DS-2CD2423G2-I

- 1/2.8" Progressive Scan CMOS; H.265+/H.265/MJPEG;
- Color: 0.008 lux@(F2.0, AGC ON), 0 lux with IR;
- 6MP : 12.5fps/15fps(3200x1800), 4MP : 25fps/30fps (2688x1520), 2MP : 25fps/30fps (1920x1080);
- VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 10m; DC12V&PoE;
- Built-in mic&speaker; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;



DS-2CD2563G2-I

DS-2CD2563G2-IS

DS-2CD2543G2-I

DS-2CD2543G2-IS

DS-2CD2523G2-I

DS-2CD2523G2-IS

- 1/2.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 lux@(F1.6, AGC ON), 0 lux with IR;
- 6MP : 20fps(3200x1800), 4MP : 25fps/30fps (2688x1520), 2MP : 25fps/30fps (1920x1080);
- VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 30m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service; Built-in microphone

- (S) : Audio/Alarm IO

NEW

Dark Fighter

FOCUS
and
ACT

AcuSense Technology



NEW

DS-2CD2086G2H-I

DS-2CD2086G2H-IU

DS-2CD2046G2H-I

DS-2CD2046G2H-IU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840x2160);25fps/30 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720)
- 4MP:25fps/30fps (2688 x 1520, 1920 x 1080, 1280 x 720) ;
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone



NEW

DS-2CD2186G2H-I

DS-2CD2186G2H-ISU

DS-2CD2146G2H-I

DS-2CD2146G2H-ISU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840x2160);25fps/30 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720)
- 4MP:25fps/30fps (2688 x 1520, 1920 x 1080, 1280 x 720) ;
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone



NEW

DS-2CD2386G2H-I

DS-2CD2386G2H-IU

DS-2CD2346G2H-I

DS-2CD2346G2H-IU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840x2160);25fps/30 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720)
- 4MP:25fps/30fps (2688 x 1520, 1920 x 1080, 1280 x 720) ;
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone



NEW

DS-2CD2T86G2H-2I

DS-2CD2T86G2H-4I

DS-2CD2T46G2H-2I

DS-2CD2T46G2H-4I

- 1/1.8" Progressive Scan CMOS;
- 25fps/24fps(3840x2160);25fps/30 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720)
- 4MP:25fps/30fps (2688 x 1520, 1920 x 1080, 1280 x 720) ;
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- *-2I/4I model: up to 60m(2Leds)/80m(4Leds) IR distance



NEW

DS-2CD2686G2HT-IZS

DS-2CD2646G2HT-IZS

- 1/1.8" Progressive Scan CMOS;
- 25fps/24fps(3840x2160);25fps/30 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720)
- 4MP:25fps/30fps (2688 x 1520, 1920 x 1080, 1280 x 720) ;
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- *Junction box is included in the camera package



NEW

DS-2CD2786G2HT-IZS

DS-2CD2746G2HT-IZS

- 1/1.8" Progressive Scan CMOS;
- 25fps/24fps(3840x2160);25fps/30 fps (3200 x 1800, 2688 x 1520, 1920 x 1080, 1280 x 720)
- 4MP:25fps/30fps (2688 x 1520, 1920 x 1080, 1280 x 720) ;
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- *Junction box is included in the camera package

Live Guard

Perlindungan proaktif, sepanjang hari



NEW

DS-2CD2087G2H-LIU/SL

DS-2CD2047G2H-LIU/SL

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080,1280×720);4MP:25ps/30fps (2688× 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams; 3D DNR; BLC; ICR;
- 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker



NEW

DS-2CD2387G2H-LISU/SL

DS-2CD2347G2H-LISU/SL

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080,1280×720);4MP:25ps/30fps (2688× 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams; 3D DNR; BLC; ICR;
- 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker



NEW

DS-2CD2T87G2H-LISU/SL

DS-2CD2T47G2H-LISU/SL

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080,1280×720);4MP:25ps/30fps (2688× 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams; 3D DNR; BLC; ICR;
- 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker



DS-2CD2086G2-IU/SL

DS-2CD2046G2-IU/SL

DS-2CD2026G2-IU/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.003 Lux @ (F1.4, AGC ON), 0 lux with IR;
- 4K : 25fps/24fps(3840×2160), 4MP : 25fps/30fps (3200×1800, 2688×1520), 2MP : 25fps/30fps (1920×1080);
- Human / vehicle classification alarm, VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 40m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker



DS-2CD2047G2-LU/SL (ColorVu)

- Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 lux @ (F1.0, AGC ON), 0 lux with LED on;
- 4MP : 25fps/30fps (2688×1520); 2MP : 25fps/30fps (1920×1080);
- VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- (U) : Built-in microphone
- (SL) : Built-in microphone and speaker



DS-2CD2386G2-ISU/SL

DS-2CD2346G2-ISU/SL

DS-2CD2326G2-ISU/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.003 lux@(F1.4, AGC ON), 0 lux with IR;
- 4K : 20fps(3840×2160), 4MP : 25fps/30fps (3200×1800, 2688×1520), 2MP : 25fps/30fps (1920×1080);
- Human / vehicle classification alarm, VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 40m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker, Audio/Alarm I/O



DS-2CD2T86G2-ISU/SL

DS-2CD2T46G2-ISU/SL

DS-2CD2T26G2-ISU/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Powered by Darkfighter technology, Color: 0.003 lux@(F1.4, AGC ON), 0 lux with IR;
- 4K : 20fps(3840×2160), 4MP : 25fps/30fps (3200×1800, 2688×1520), 2MP : 25fps/30fps (1920×1080);
- Human / vehicle classification alarm, VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 40m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker, Audio/Alarm I/O

Perangkat Keras Mutakhir

aperture super besar hingga F1.0 dan sensor canggih

Pemrosesan gambar yang terkini

Teknologi perintis 1SP menghasilkan warna yang presisi untuk menampilkan gambar yang jelas dan tajam hingga 130 dB WDR



Kehandalan Super Tinggi

Teknologi penyalarsan aktif menjamin kinerja pemfokusan dalam produksi massal produk ColorVu berdefinisi ultra tinggi



NEW

DS-2CD2087G2H-LI

DS-2CD2087G2H-LIU

DS-2CD2047G2H-LI

DS-2CD2047G2H-LIU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720);
- 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone



NEW

DS-2CD2187G2H-LI

DS-2CD2187G2H-LISU

DS-2CD2147G2H-LI

DS-2CD2147G2H-LISU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720);
- 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 30m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone



NEW

DS-2CD2387G2H-LI

DS-2CD2387G2H-LIU

DS-2CD2347G2H-LI

DS-2CD2347G2H-LIU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720);
- 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone



NEW

DS-2CD2187G2H-LI

DS-2CD2147G2H-LI

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720);
- 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;



NEW

DS-2CD2687G2HT-LIZS

DS-2CD2667G2HT-LIZS

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720);
- 6MP:25fps/30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz; 24 fps(3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;



NEW

DS-2CD2787G2HT-LIZS

DS-2CD2767G2HT-LIZS

DS-2CD2747G2HT-LIZS

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720);
- 6MP:25fps/30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz; 24 fps(3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720);
- 2MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON),0 Lux with light
- VCA functions; 3 streams
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;

ColorVu + Panoramic



Panoramic Cameras with ColorVu



180° Single-channel panoramic view with minimal distortion



Colorful imaging 24/7



Human and vehicle classification



Live Guard

ColorVu
Technology

AcuSense
Technology



NEW

DS-2CD2387G2P-LSU/SL (C)

DS-2CD2347G2P-LSU/SL (C)

- 4K:2*1/1.8" Progressive Scan CMOS; 20fps(5120×1440), 4 MP+4 MP resolution, 4MP:2*1/2.5" Progressive Scan CMOS; 25/24fps(3040×1368), 3 MP+3 MP resolution - H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 lux @(F1.0, AGC ON), 0 lux with LED on;
- VCA functions; 2 streams; 3D DNR; BLC; ICR; 3000K Warm LED; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker, Audio/Alarm I/O; 180° FOV



NEW

DS-2CD2T87G2P-LSU/SL (C)

DS-2CD2T47G2P-LSU/SL (C)

- 4K:2*1/1.8" Progressive Scan CMOS; 20fps(5120×1440), 4 MP+4 MP resolution, 4MP:2*1/2.5" Progressive Scan CMOS; 25/24fps(3040×1368) 3 MP+3 MP resolution - H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 lux @(F1.0, AGC ON), 0 lux with LED on;
- VCA functions; 2 streams; 3D DNR; BLC; ICR; 3000K Warm LED; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Built-in microphone and speaker, Audio/Alarm I/O; 180° FOV



DS-2CD2935FWD-IS

- 1/2.5" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.01 lux@(F1.2, AGC ON), 0 lux with IR;
- 5MP : 20fps(2944×1656), 25fps/30fps(2560×1440), 3MP : 25fps/30fps (2048×1536, 1920×1080);
- 1.16mm@F2.2, field of view: 180°(H)×180°(V); 120dB WDR; 2 streams; 3D DNR; BLC; ICR; EXIR 2.0, up to 10m(optional); DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service
- (S) : built-in mic, Audio/Alarm I/O



DS-2CD2345G0P-I

- 1/2.7" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.028 lux@(F2.0, AGC ON), 0 lux with IR;
- 25fps/24fps (2688×1520); VCA functions; dual streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 10m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service



DS-2CD2T45G0P-I

- 1/2.7" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.028 lux@(F2.0, AGC ON), 0 lux with IR;
- 25fps/24fps (2688×1520); VCA functions; dual streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 10m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service



NEW

DS-2DE2C400MWG-E

DS-2DE2C200MWG-E

1/2.7, Progressive Scan CMOS

Color: 0.01 Lux @(F1.2,AGC ON), B/W: 0 Lux with IR

2.8 mm, horizontal FOV 105°, vertical FOV 58°, diagonal FOV 123°

4 mm, horizontal FOV 81°, vertical FOV 44°, diagonal FOV 97°

White Light Distance: up to 30 m IR Distance: up to 30 m

Digital WDR, BLC, HLC, 3D DNR, Built-in Microphone, Built-in Speaker



DS-2DE3404W-DE

DS-2DE3204W-DE

- High quality imaging with 4 MP / 2MP resolution
- Clear imaging against strong back lighting due to 120 dB WDR technology
- Pan and tilt ability enables camera to monitor zones of interest
- 4 × optical zoom allows for closer viewing of subjects in expansive areas
- Color: 0.1lux/F2.0, B/W:0.01lux/F2.0, Angle of View: 80-33.5 degree (Wide~Tele), Pan range:0°~350°; Tilt range: 0°~90°(Auto Flip), PoE&12VDC



DS-2DE3A404IW-DE

- 4MP H.265+/H.265; 4x optical zoom;120 dB WDR; 12VDC & PoE;
- Powered by DarkFighter;IP66 ;Up to 50 m IR distance
- Built-in speaker and microphone for audible warning and two-way audio;
- White light flashing when alarm triggers
- (/W) : Wifi



DS-2DE3A400BW-DE

- 4MP H.265+/H.265;120 dB WDR;12VDC & PoE;
- ColorVu;IP66 ;
- Built-in speaker and microphone for audible warning and two-way audio;
- White light flashing when alarm triggers
- Accurate human and vehicle target classification and alarm, based on deep learning algorithm
- Support face capture. Up to 5 faces captured at the same time



DS-2DE2A404IW-DE3(2.8-12mm)

- 4MP, 1/3" CMOS,H.265+/H.265/H.264+/H.264 codec 3D DNR, ICR,Color:
- 0.005lux/F1.6, B/W:0.001lux/F1.6,
- 4x optical zoom, Angle of View: 100° to 33° (Wide-Tele), Digital Zoom:16X,
- 4MP : 2560 × 1440:30fps, Pan range:0°~330°; Tilt range: 0°~90°(Auto Flip), Pan Speed: 0.1° -100°/s, Tilt Speed: 0.1° -100°/s, 20m IR, POE&12VDC



DS-2DE4425IW-DE

DS-2DE4225IW-DE

DS-2DE4215IW-DE

- 4MP, 1/2.5" CMOS,H.265+/H.265/H.264+/H.264 codec, 3D DNR, True WDR,
- Ultra-low light Powered By DarkFighter
- Color: 0.005lux/F1.6, B/W:0.001lux/F1.6,
- Optical Zoom:25x/15x, Digital Zoom:16X100m IR
- 4MP : 2560*1440:30fps; 2MP : 1920*1080:30fps. Pan Speed: 0.1° -80°/s, Tilt Speed: 0.1° -80°/s, PoE&12VDC
- Smart Detection



DS-2DE4A225IW-DE

DS-2DE4A425IW-DE

- High quality imaging with 4MP / 2MP resolution
- Excellent low-light performance via powered-by-DarkFighter technology
- Clear imaging against strong back lighting due to 120 dB WDR technology
- Pan and tilt ability enables camera to monitor zones of interest
- 25x optical zoom allows for closer viewing of subjects in expansive areas
- Up to 50m IR range ensures safety at night
- Water and dust resistant (IP66)



DS-2DE5225W-AE

DS-2DE5225W-AE3

- 4MP, 1/2.5" CMOS,H.265+/H.265/H.264+/H.264 codec, 3D DNR, True WDR,
- Ultra-low light Powered By DarkFighter
- Color: 0.005lux/F1.6, B/W:0.001lux/F1.6,
- Optical Zoom:25x/15x, Digital Zoom:16X100m IR
- 4MP : 2560*1440:30fps; 2MP : 1920*1080:30fps. Pan Speed: 0.1° -80°/s, Tilt Speed: 0.1° -80°/s, PoE&12VDC
- Smart Detection



DS-2SE4C215MWG-E

DS-2SE4C225MWG-E

DS-2SE4C415MWG-E

DS-2SE4C425MWG-E

- Captures a large area and great details at the same time
- High quality imaging with 4 MP/2 MP resolution
- Excellent low-light performance with powered by DarkFighter technology and ColorVu technology
- Secures an expansive area with 15x / 25x optical zoom and 16 × digital zoom
- Supports WDR, HLC, BLC, 3D DNR, defog, regional exposure, regional focus
- Expansive night view with up to 100 m IR distance & 30 m white light
- Supports 12 VDC & PoE+

M-Series

NVR



2 channels @ 32 MP, 8 @ 8 MP,
16 @ 4 MP, or 32 @ 1080p
decoding capacity

Up to 400 Mbps bandwidth
for 64-channel NVRs, even
with RAID enabled

8K or dual 4K resolution
output, and up to 14 TB
capacity per HDD



DS-7608NI-M2 128Mbps

DS-7608NI-M2/8P 128Mbps

DS-7616NI-M2 256Mbps

DS-7616NI-M2/16P 256Mbps

- Up to 256Mbps Bit Rate Input Max (up to 16-ch IP video),
- 16x4MP decoding capability,HDMI up to 8K,
- 2 SATA Interfaces, alarm I/O: 4/1, 380 1U case
- (xP) : up to 16 independent PoE network interfaces,



DS-7716NI-M4 256Mbps

DS-7716NI-M4/16P 256Mbps

DS-7732NI-M4 320Mbps

DS-7732NI-M4/16P 320Mbps

- 320Mbps Bit Rate Input Max (up to 32-ch IP video),
- 32x2MP decoding capability, 4 SATA Interfaces, 2 HDMI outputs(up to 8K), 1 eSATA, alarm I/O: 16/9, 1.5U case,19"
- (xP) : 16 independent PoE network interfaces,



DS-7104NI-Q1/M 40Mbps

DS-7104NI-Q1/4P/M 40Mbps

DS-7108NI-Q1/M 60Mbps

DS-7108NI-Q1/8P/M 60Mbps

- 60Mbps Bit Rate Input Max (up to 4-ch IP video)
- 1 SATA interface, mini 1U case up to 6TB per HDD
- 2-ch 1080P,or 1-ch 7M max



DS-7604NXI-K1 40Mbps

DS-7608NXI-K1 80Mbps

DS-7616NXI-K1 160Mbps

DS-7608NXI-K2 80Mbps

DS-7616NXI-K2 160Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7604NI-Q1 40Mbps

DS-7608NI-Q1 80Mbps

DS-7616NI-Q1 160Mbps

DS-7608NI-Q2 80Mbps

- Up to 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- 1/2 SATA interface, standalone 1U case, alarm I/O: 4/1(optional)



DS-7604NI-Q1/4P 40Mbps

DS-7608NI-Q1/8P 80Mbps

DS-7608NI-Q2/8P 80Mbps

DS-7616NI-Q2/16P 160Mbps

- Up to 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- 1/2 SATA interface, standalone 1U case, alarm I/O: 4/1(optional)
- (xP) : Up to 16 port independent PoE network interface



DS-7604NXI-K1/4P 40Mbps

DS-7608NXI-K1/8P 80Mbps

DS-7608NXI-K2/8P 80Mbps

DS-7616NXI-K2/16P 160Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- plug & play with 16 Power-over-Ethernet (PoE) interfaces
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7716NXI-K4 160Mbps

DS-7716NXI-K4/16P 160Mbps

DS-7732NXI-K4 256Mbps

DS-7732NXI-K4/16P 256Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 256 Mbps incoming bandwidth, Max(up to 32-ch IP video),
- (xP) : 16 independent PoE network interfaces,
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7716NXI-I4/S 256Mbps

DS-7716NXI-I4/16P/S 256Mbps

DS-7732NXI-I4/S 256Mbps

DS-7732NXI-I4/16P/S 256Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 256 Mbps incoming bandwidth, Max(up to 32-ch IP video),
- (xP) : 16 independent PoE network interfaces,
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs

Hikvision Smart Managed Switches

Video Cerdas, Jaringan yang Lebih Pintar

Semua di Ponsel

Pemecahan masalah jarak jauh

Manajemen berbasis cloud terpadu untuk sistem keamanan

Topologi jaringan dalam genggaman Anda



*Free Exchange for 10ports & below, the rest items only 2 years warranty for repairing



Manajemen Topologi yang Divisualisasikan




Pemantauan Kesehatan Jaringan yang Efisien



Notifikasi Alarm Real-Time



Kontrol & Preview Video yang Nyaman

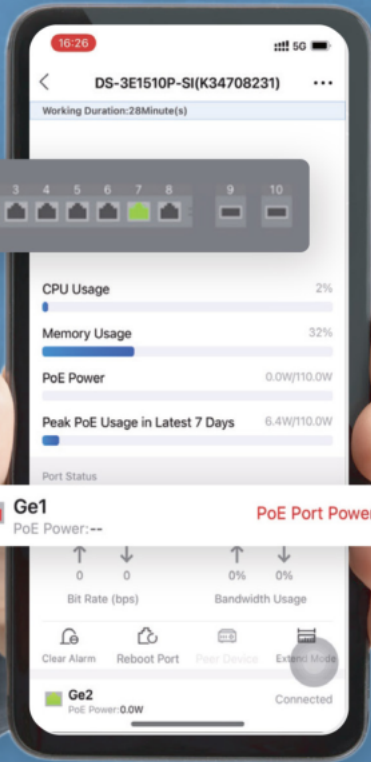

Smart Managed Switch Hikvision



DS-3E1105P-EI
DS-3E1309P-EI

- L2, Smart Managed, Up to 8 x 10/100M RJ45 PoE ports, 1 10/100 Mbps or Gigabit RJ45 port,
- 802.3af/at, PoE power budget 110W, Max. 300 meter PoE transmission,
- Supports Hik-Central/iVMS 4200/HikPartner-Pro Unified Topology Management, cloud management, health monitor



DS-3E1510P-SI
DS-3E1518P-SI
DS-3E1526P-SI

- L2, Smart Managed, Up to 24 Gigabit PoE ports, 2 Gigabit SFP ports,
- 802.3af/at, PoE power budget up to 370W, max. 300 meter long distance PoE transmission,
- PoE watchdog, VLAN, QoS, SNMP, Port Mirroring, Storm Control, Visualized Topology Management, Network Health Monitor, Real-Time Alarm Push and Video Control and Preview



HOT
DS-3E1105P-EI
DS-3E1309P-EI
DS-3E1318P-EI
DS-3E1326P-EI

- L2, Smart Managed, 16 10/100M RJ45 PoE ports, 2 Gigabit combo ports, 802.3af/at,
- PoE power budget 230W, Max. 300 meter long distance PoE transmission,
- Visualized Topology, Management, Network Health Monitor, Real Time Alarm, Push and Video Control and Preview



HOT
DS-3E1505P-EI/M
DS-3E1506P-EI/M
DS-3E1510P-EI/M
DS-3E1518P-EI/M
DS-3E1526P-EI/M

- L2, Smart Managed, 24 Gigabit RJ45 PoE ports, 1 Gigabit RJ45 port, 1 Gigabit SFP port, 802.3af/at,
- PoE power budget 230W, HPP Cloud managed, VLAN, STP/RSTP loop, prevention, PoE watchdog, Max. 300 meter PoE transmission, Rack mount



HOT
DS-3E1505P-EI
DS-3E1506P-EI
DS-3E1510P-EI
DS-3E1518P-EI
DS-3E1526P-EI

- L2, Smart Managed, 24 Gigabit RJ45 PoE ports, 1 Gigabit RJ45 port, 1 Gigabit SFP port, 802.3af/at,
- PoE power budget 370W, HPP Cloud managed, VLAN, STP/RSTP loop, prevention, PoE watchdog, Max. 300 meter PoE transmission, Rack mount

PoE Switch

Cerdas • Kokoh • Aman



DS-3E0105P-E/M

DS-3E0106P-E/M

DS-3E0109P-E/M

- L2, Unmanaged, Up to 8 x 10/100M RJ45 PoE ports, 1 x 10/100M RJ45 uplink port,
- 802.3af/at, PoE power budget 60W, max. 250m long distance transmission, 6KV surgy protection



DS-3E0310P-E/M

DS-3E0318P-E/M

DS-3E0326P-E/M

- L2, Unmanaged, Up to 24 x 10/100M RJ45 PoE ports, 1 Gigabit RJ45 uplink port, 1 Gigabit SFP uplink port,
- 802.3af/at, PoE power budget up to 230W, "Extend" Mode port up to 250meter, 6KV surgy protection



DS-3E0505P-E/M

DS-3E0510P-E/M

DS-3E0518P-E/M

DS-3E0526P-E/M

- L2, Unmanaged, Up to 24 Gigabit POE ports, 2 Gigabit SFP uplink ports,
- 802.3af/at, PoE power budget up to 225w



DS-3E0105P-E

DS-3E0109P-E

DS-3E0318P-E

DS-3E0326P-E

- L2, Unmanaged, Up to 24 x 10/100M RJ45 PoE ports, 2 Gigabit combo ports,
- 802.3af/at, PoE power budget up to 370W, "Extend" Mode ports support up to 250 meter, 6KV surgy protection



DS-3E0505P-E

DS-3E0510P-E

DS-3E0518P-E

DS-3E0526P-E

- L2, Unmanaged, Up to 24 Gigabit POE ports, 1 Gigabit RJ45 uplink port, 1 Gigabit SFP uplink port,
- 802.3af/at, PoE power budget Up to 370w



DS-3E0505HP-E

DS-3E0510HP-E

DS-3E0520HP-E

DS-3E0528HP-E

- L2, Unmanaged, Up to 24 Gigabit RJ45 PoE ports, 2 Gigabit RJ45, 2 Gigabit SFP uplink ports,
- 802.3af/at/bt, Up to 4 port support Hi-PoE 90w, PoE power budget up to 370W, Extend mode support up to 300meter, 6KV surge protection,
- supports POE watchdog, port isolation

NEW



DS-3E0105P-E/M

DS-3E0106P-E/M

DS-3E0109P-E/M

DS-3E0310P-E/M

- L2, Unmanaged, 8 10/100M RJ45 PoE ports, 2 Gigabit RJ45 uplink ports, 802.3af/at,
- PoE power budget 60W, max. 300m long distance transmission, 6KV surge protection

NEW



DS-3E0105P-E

DS-3E0109P-E

DS-3E0318P-E

DS-3E0326P-E

- L2, Unmanaged, 24 10/100M RJ45 PoE ports, 2 Gigabit combo ports, 802.3af/at,
- PoE powerbudget 370W, ports 17 24 support up to 300meter, 6KV surge protection, PoE watchdog, port isolation

NEW



DS-3E0505HP-E

DS-3E0510HP-E

DS-3E0520HP-E

DS-3E0528HP-E

- L2, Unmanaged, 24 Gigabit RJ45 PoE ports, 2 Gigabit RJ45, 2 Gigabit SFP uplink ports, 802.3af/at/bt, port 14 support Hi PoE 90w,
- PoE power budget 370W, ports 21 24 support up to 300meter, 6KV surge protection, supports POE watchdog, port isolation



Produk NON-CCTV



NEW

DS-KV8113-WME1

- 2 MP camera with IR supplement
- One nametag button calling design for easier calls
- Built in card reader module
- Standard PoE power supply
- IK08 & IP65 higher protection level with aluminum alloy material
- Convenient Hik Connect APP mobile control



NEW

DS-KH6320-WTE1

- 7" Touch Screen Indoor Station,
- 7 inch Colorful TFT LCD, display resolution: 1024 * 600
- 10/100Mbps Ethernet, Wi Fi 802.11b/g/n
- standard PoE/ 12 VDC.
- TF card, max 32G
- 8 ch alarm input, 2xalarm output, 1x485



NEW

DS-KB8113-IM

- 2MP HD Camera with IR supplement providing excellent image quality
- Supports standard POE power supply
- Supports mechanical doorbell, easier to call
- Convenient Hik Connect APP Mobile Control: Receive calls, open the door and live view remotely
- Supports web configuration
- Higher protection level: IK09 & IP65



DS-KIS702Y

- IP video intercom kit for villa or house, only one call button.
- DS-KD8003-IME2/Surface x 1;
- DS-KH6320-WTE2 x 1;
- DS-KAD704 x 1;
- DS-KAW30-2N x 1;
- 16GB TF card x1;



DS-KIS202 (NEW)

- Analog Kit
- Kit including DS-KB2411-IM and DS-KH2220
- Include one monitor, one outdoor panel, 5-meter 4-wire cable, and other accessories
- you have to mark which standard adapter you want when you place an order



DS-KIS203(NEW)

- Water Proof Analog Kit
- Kit including DS-KB2421IM and DS-KH2220
- Include one monitor, one metal outdoor panel, 5-meter 4-wire cable, and other accessories
- you have to mark which standard adapter you want when you place an order



HOT

DS-KIS604-P

DS-KIS606-P

- IP video intercom kit for villa or house, only one call button.
- DS-KV8113-WME1 x1;
- DS-KH6320-WTE1 x1;
- 4 port standard PoE switch x1; (for KIS604-S)
- PSU x2;(for KIS604-P)
- 16GB TF card x1;
- No need additional power supply, but you have to mark which standard of power line type of the PoE switch you want when you place an order.(for KIS604-S)
- It includes 2 European power adapters, if you want to change the standard of power supply, you have to mark which standard of power adapter you want when you place an order.(for KIS604-P)

DS-K1T8003MF

- Terminal akses kontrol sidik jari
Layar LCD 2,4 inci dibekali dengan modul pembaca kartu Mifare, Komunikasi:TCP/IP, Ehome
- Kapasitas 1000 pengguna, 1000 sidik jari, 1000 kartu Mifare dan Maks. 100.000 catatan kejadian;
- Mendukung Kontrol Akses dan Fungsi Absensi, modul optic sidik jari;
- Mendukung 6 status kehadiran, termasuk jam masuk, jam pulang, istirahat dimulai, istirahat selesai, lembur di mulai, lembur selesai
- Membuka pintu dari jarak jauh melalui klien seluler Hik-Connect, tamper alarm.



DS-K1T801M

- Standalone Access Control Terminal, Built-in Mifare card reading module,
- Storage with 3,000 cards; 12 Keys keyboard and doorbell, DC 12V/1A



NEW

DS K1T804AMF (NEW)

DS-K1T804AEF

- 2.4 inch LCD Display Standalone Access Control Terminal, Built-in Mifare card (M) or EM card (E) reading module,
- Storage with 3,000 cards, 3,000 fingerprints and 100,000 access control events;
- Support Access Control and Time Attendance Function, Optical Fingerprint Module;
- Uplink Communication: TCP-IP, WIFI; Supports Wiegand, Supports ISUP5.0, ISAPI
- Multiple languages: English, Spanish, Italian, French, Portuguese (Brazilian), Vietnamese, Arabic, Thai, Turkish, Indonesian, Ukrainian



NEW

DS-K1A8503MF

DS-K1A8503EF

DS-K1T805MBFWX

- 2.4 inch LCD Display Standalone Access Control Terminal, Built-in Mifare card (M) or EM card (E) reading module,
- Storage with 3,000 cards, 3,000 fingerprints and 100,000 access control events;
- Support Access Control and Time Attendance Function, Optical Fingerprint Module;
- Uplink Communication: TCP-IP, WIFI; Supports Wiegand, Supports ISUP5.0, ISAPI
- Multiple languages: English, Spanish, Italian, French, Portuguese (Brazilian), Vietnamese, Arabic, Thai, Turkish, Indonesian, Ukrainian

AKSES KONTROL TANPA SENTUH

MinMoe DS-K1T321 Series

DS-K1T321MFX
DS-K1T321EFX
DS-K1T321MFWX

- 2.4 inch LCD screen, 2 MP lens
- Multiple authentication methods, including face, fingerprint, card (M1 card), and PIN, etc.
- Max. 500 faces, 3000 cards, 3000 fingerprints and 150,000 events
- Face recognition duration < 0.2 s/User
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the PC web client and mobile web client
- Supports wired network and Wi Fi (APmode)
- Supports wiring with secure door control unit or card reader via RS 485

500
Faces

3,000
Fingerprints
(optional)

3,000
Cards



DS-K1T343MFX

DS-K1T343MX

DS-K1A340

- Face Recognition Terminal (A : Time Attendance only) , 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens, Built-in Mifare card reading module (M);
- Max.1,500 faces capacity Max.3,000 cards (M); Max.3,000 fingerprints capacity (F), up to 300,000 attendance records
- Face recognition in dark environment, IP65,
- Two-way audio with client software, indoor station, and master station
- Supports TCP/IP (Only T Model), DC 12V/1A, Supports ISUP5.0, ISAPI
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- (A) Support Local Attendance
- multiple languages: English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
- Configuration via the web client
- Face Recognition Accuracy Rate > 99%, Duration(1:N) ≤0.2s, Distance: 0.3m ~ 1.5m



DS-K1T342MX

DS-K1T342MFX

DS-K1T342MFWX

- Face Recognition Terminal, 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens, Built-in Mifare card reading module;
- Max.1,500 faces capacity Max.3,000 cards; Max.3,000 fingerprints capacity (F)
- Face recognition in dark environment, IP65, Configuration via the web client
- Two-way audio with client software, indoor station, and master station
- Supports TCP/IP, WiFi, DC 12V/1A, Supports ISUP5.0, ISAPI
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- multiple languages: English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
- Face Recognition Accuracy Rate > 99%, Duration(1:N) ≤0.2s, Distance: 0.3m ~ 1.5m



NEW

DS-K1T341CMF

DS-K1T341CM

- Face Recognition Terminal, 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens, Built-in Mifare card reading module;
- Max.1,500 faces capacity Max.3,000 cards; Max.3,000 fingerprints capacity (F)
- Face recognition in dark environment, IP65, Configuration via the web client
- Two-way audio with client software, indoor station, and master station
- Supports TCP/IP, WiFi, DC 12V/1A, Supports ISUP5.0, ISAPI
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- multiple languages: English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
- Face Recognition Accuracy Rate > 99%, Duration(1:N) ≤0.2s, Distance: 0.3m ~ 1.5m

Kecepatan Koneksi Lancar di Setiap Kesempatan



*free exchange



NEW

DS-3WR12GC

- Four 5 dBi amplified antennas
- Beamforming optimizes signal
- Beamforming optimizes signal
- Dual band Smart signal switching
- Dual band Smart signal switching
- Broadband account synchronization



NEW

DS-3WR4G12C

- AC1200 Dual band Wi Fi
- 4G Boost Faster Speed
- In stantly Access a Mobile Network With a SIM Card



DS-3WR3N

- 5-dBi amplified antennas
- Dual antennas for maximum coverage
- Supports IPTV
- Data Rate: 2.4 GHz: 300 Mbps
- Antenna: Two 5-dBi amplified antennas
- Wireless Standard: IEEE 802.11b/g/n @ 2.4 GHz
- Working Frequency Band: 2.4 GHz



DS-3WR12C

- Four 5-dBi amplified antennas
- Beamforming optimizes signal
- Dual band – Smart signal switching
- Broadband account synchronization
- Data Rate: 5 GHz: 867 Mbps; 2.4 GHz: 300 Mbps
- Antenna: Four 5-dBi amplified antennas
- Wireless Standard: IEEE 802.11/a/n/ac wave 2 @ 5 GHz; IEEE 802.11b/g/n @ 2.4 GHz
- Working Frequency Band: 2.4 GHz, 5 GHz

Hikvision Kabel Jaringan

Pilihan Pertama, Selamanya Terpercaya

Pilihan untuk

Sistem CCTV

Lapisan tahan Api



Bahan tahan terhadap api peregangan, dan penuaan

Teknologi Memutar yang tepat



Peningkatan kemudahan aliran ke data transmisi

99,95%
Kemurnian Cu



Konduktivitas yang lebih tinggi dengan redaman transmisi sinyal yang lebih rendah

0.565 mm
Diameter Kawat

Transmisi sekarang lebih stabil dengan resistensi yang berkurang



NEW

DS-1LN6UZCO

- CAT6 U/UTP Network
- Cable (Solid Copper,0.5mm)



NEW

DS-1LN6UECO

- CAT6 U/UTP Network
- Cable (Solid Copper,0.53mm)



NEW

DS-1LN6UU/CCA

- CAT6 U/UTP Network
- Cable (Solid Copper,0.57mm)



DS-1LN6-UE-W

- UTP CAT 6, 305 meters, Core diameter: 0.53mm, Solid Copper, CM, white



DS-1LN5E-E/E

- UTP CAT 5E, 305 meters,
- Core diameter: 0.45mm
- OFC, CMX, gray



DS-1LN6U-G

DS-1LN6U-W/CCA

- UTP CAT 6, 305 meters
- Core diameter: 0.585mm, CCA, white
- Core diameter: 0.55mm Solid Copper, gray



KATALOG RETAIL **2024**



Scan QR Code

PT. HIKVISION TECHNOLOGY INDONESIA

Head Office

DKI Jakarta

APL Tower Lt. 15 Unit T1, T8, T9
Jl. Letjen S. Parman Kav. 28
Jakarta 11470
(021) 29339366

Branch Office

Surabaya

Pakuwon Center 16th Floor, Unit 11
Tunjungan Plaza Superblock
Jl. Embong Malang No. 1,3 & 5
Surabaya 60261
(031) 99250125

Medan

Forum Nine 7th Floor
Jl. Imam Bonjol No. 9
Medan Petisah, Medan
Sumatera Utara 20112
(061) 88815838